



7 INCH SANDER (AIR)

PNEUMATIC 7 INCH SANDER

The 7" sander is a heavy duty production tool equipped with the NAVSEA required double safety lock-off lever. Hook and loop back-up pads are used with condition discs. A rigid back-up pad with a center nut is used with coated abrasives. Dust shrouds are optional. Systems and kits are available.

Specifications

- Power: 90 psi @ 18 CFM
- Speed: 4500 rpm
- Weight: 5 lbs
- Length: 12.5"

Features

- NAVSEA required double safety lock-off lever
- Grease fitting for tool lubrication
- Versatile, light weight, and powerful




Sander Configurations

Part	NSN	Backup Pad	Abrasives Supported
151.119	5130-01-460-8197	Rigid w/Center Nut Fastening	Coated Abrasives or Rip Discs
151.110	5130-01-460-8604	Rigid w/Hook & Loop Fastening	Condition Discs or Clean & Strip



- Config: Coated Abrasives
- Backup Pad: Rigid w/Center Nut

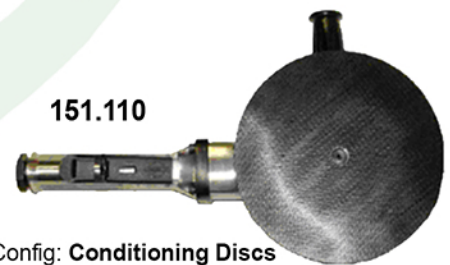

- Config: Conditioning Discs
- Backup Pad: Hook & Loop

Abrasives

Coated Abrasives



Part	Description
815.7424	7" 24 grit
815.7436	7" 36 grit
815.7450	7" 50 grit
815.7480	7" 80 grit
500.153	Backup pad for above
200.017	7" Rip Disc (16 grit)
200.016	Backup pad for Rip Disc

Conditioning Discs



Part	Description
810.715	7" Super Coarse (dark brown)
810.714	7" Coarse (brown)
810.712	7" Medium (maroon)
810.710	7" Super Fine (blue)
810.751	7" Clean & Strip (Black)
820.009	Backup pad for above



Desco Mfg. Co., Inc.

23031 Arroyo Vista • Rancho Santa Margarita, CA 92688
www.descomfg.com • info@descomfg.com • (800) 337-2648